


DECLARATION OF PERFORMANCE
SUSPENDED CEILING "SOFTWOOL" (DOP)



RAINBOW

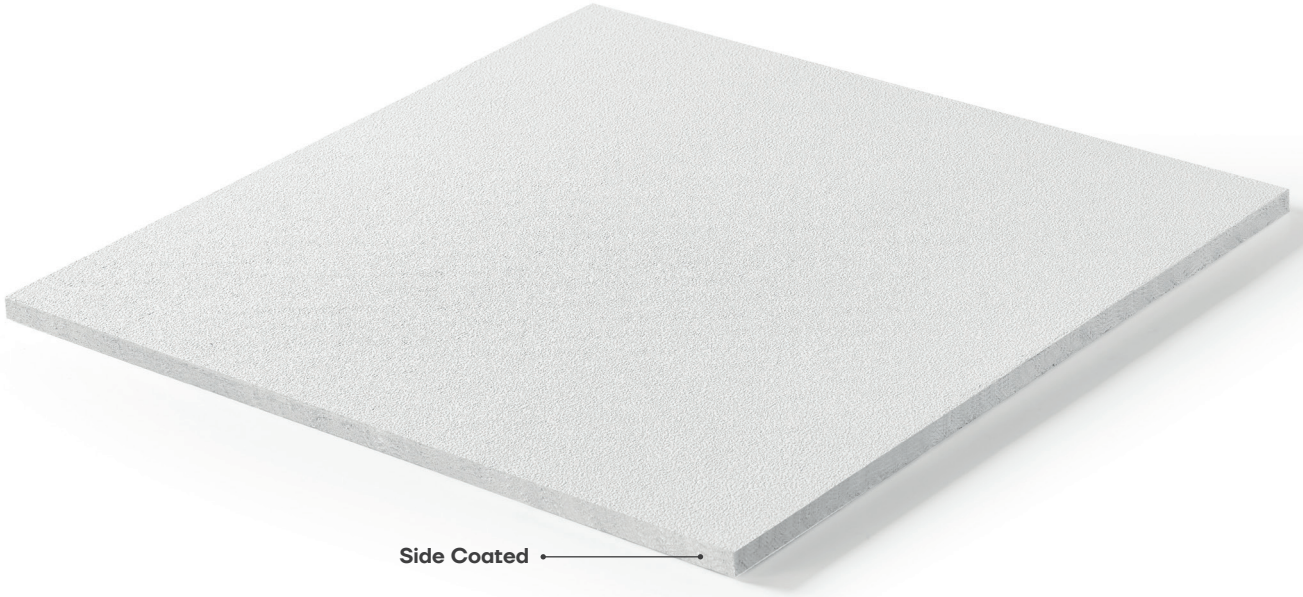

- 1. Identification code of the product type:**
Stonewool Board with Micro-Textured Fiberglass covered.

- 2. Type, batch or serial number or any other element allowing identification of the construction product:**
Stonewool Board, 130 kg/m³ and 15 mm.

- 3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:**
Thermal, Acoustic, Moisture, Fire insulation material.









- 4. Name and address of the manufacturer:**
TROMER ENERJI A.Ş. Sultansazı O.S.B. Mah. 2.cad. No: 20 Incesu - Kayseri / TURKEY

- 5. Name and address of the authorized representative:**
Tamer Şinik / TROMER ENERJI A.Ş. Sultansazı O.S.B. Mah. 2.cad. No: 20 Incesu - Kayseri / TURKEY

- 6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:**
System 3

- 7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:**
Efectis Era Avrasya Test ve Belgelendirme A.Ş. accredited by TÜRKAK under registration number AB-0556-T for EN ISO/IEC 17025:2017 as test laboratory.


- 8. (INTERNAL CEILING BOARD)** The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8 This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

	Essential Characteristic	Performance	Harmonized Technical Spec.
	Reaction to fire to Class	+A1	TS EN 13964:2014
	Emission of hazardous substances for indoor environments (ZA)	Mineral stone wool does not provide nutrients for microorganisms.	
	Environmental Impact	Recyclable Material	
	Sound Absorption	α_w : 0.95	
	Moisture and Sagging Resistance	Provides protection in high humidity	
	Light Reflection	86%	
	Thermal Conductivity (EN 12667)	Max.0,035 W/Mk	TS EN 12086
	Cleanroom compatibility	Class:ISO 4($\geq 0,5 \mu\text{m}$)	ISO 14644-1

SOUND ABSORPTION

Sound Absorption Class

α_w : 0.95 (Class A)

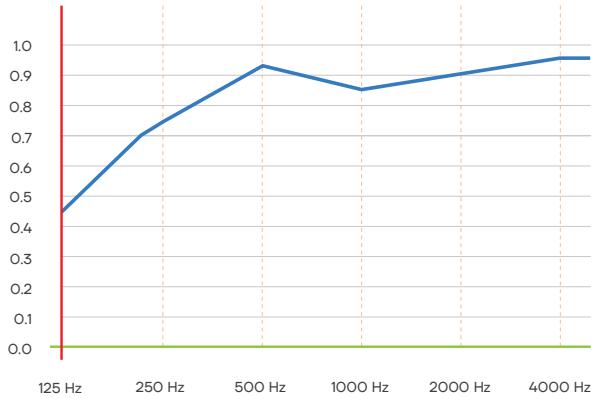

MEDI
CEIL

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption Class	NRC
A: 15/200	0.45	0.75	0.95	0.85	0.90	0.95	0.95	A	0.90

Signed for and on behalf of the manufacturer by

Name And Function

Tamer Şinik

Place And Date Of Issue

KAYSERİ / 2025

Signature